



Updating Firmware – iPhone 8, 8 Plus and X users


1. To update firmware connect to your DZero Power Meter through the Qalvin BLE App.

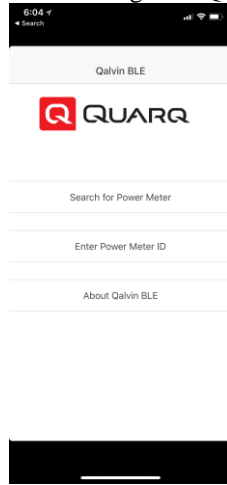


2. Once connected, scroll to the bottom of the "Home Page" and click on the "Firmware" tab. Then tap "Check for Available Firmware".

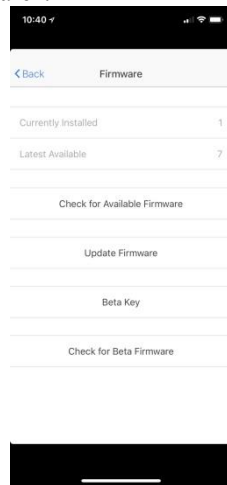


3. If a more recent firmware is available than what is currently installed, tap "Update Firmware". Your phone will begin to update the Bootloader and power meter device Application.

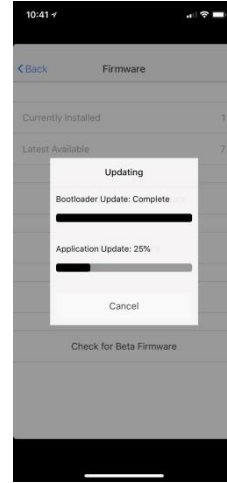


4. If the firmware update appears to be stuck while "Reconnecting" or gets stuck partway through the update your power meter LED will be flashing Amber. If this happen then follow these steps to finish updating the firmware:

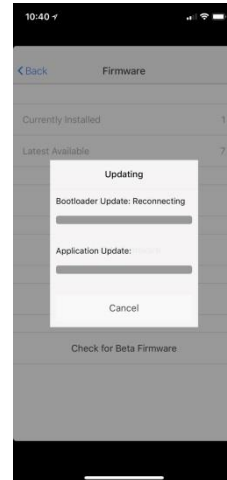

5. First, force quit the Qalvin BLE app (<https://support.apple.com/en-us/HT201330>). The example here shows an iPhone X force closing the Qalvin BLE application.

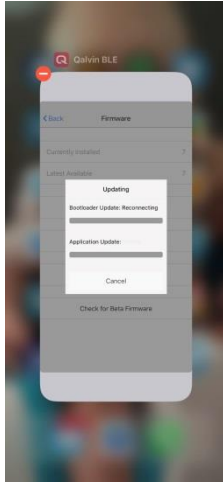

6. Once closed, go to your phone's Bluetooth Settings to turn your Bluetooth OFF and then back ON.

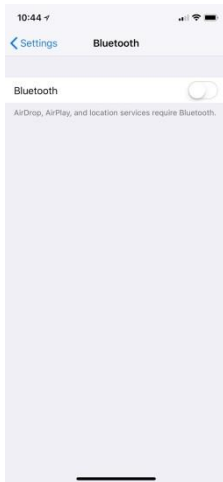


7. Once the Bluetooth is back ON, re-open Qalvin BLE and connect to your DZero by selecting "Enter Power Meter ID". Enter in the 5 digit serial number (link to serial pic) engraved on your power meter.


Do not pair to the power meter by selecting "Search for Power Meter".



8. The Firmware page will automatically load. Select "Update Firmware" to begin installing the latest firmware.

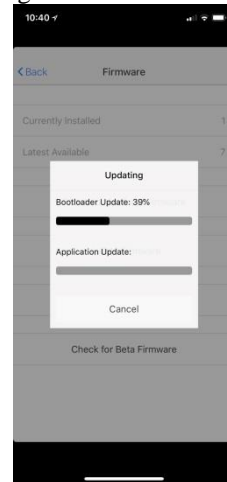

9. Once the firmware update is complete, it will return to the home screen and ask to reconnect. Upon reconnection you can then verify that the update was completed by checking your “Software Revision” is on the latest version.

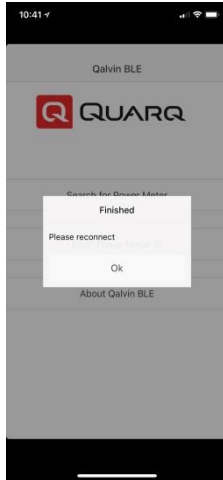

If you have additional question or need further assistance please call our Customer Service team at: 1-800-660-6853 or via email at thinkfast@quarq.com